

EliTe PLUS

PV MODULE


- ET-M754BH385BB 385W
- ET-M754BH390BB 390W
- ET-M754BH395BB 395W
- ET-M754BH400BB 400W
- ET-M754BH405BB 405W



KEY FEATURES

- 
1500 High Voltage
 UL and IEC 1500V certified; lowers BOS costs and yields better
- 
High Efficiency
 Higher module conversion efficiency benefit from half cell structure (low resistance characteristic).
- 
PID Resistance
 Excellent Anti-PID performance guarantee limited power degradation for mass production.
- 
THE-STATE-OF-THE-ART APPEARANCE
 Full black designed for a better aesthetic appearance and building integration.
- 
Severe Weather Resilience
 Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).
- 
Durability Against Extreme Environmental Conditions
 High salt mist and ammonia resistance certified by TUV SUD

WARRANTY

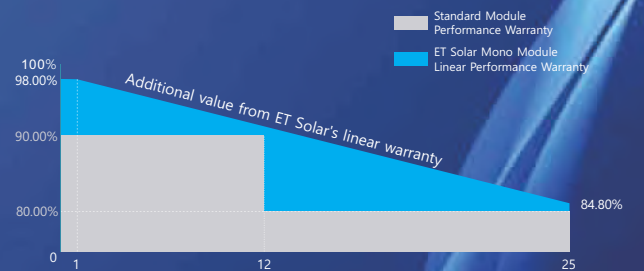

- 25** 25-years Linear Performance Warranty
- 12** 12-years Product Material & Workmanship
- 0.55** 1st year $\leq 2\%$, 2nd~25th years $\leq 0.55\%$ / year

IEC61215
IEC61730
UL61215
UL61730



Munich RE 

